

5411 Seymour Hwy Wichita Falls, TX 76301

Tel: 940-767-7694 Fax: 940-687-0751

WWW.NITROUSEXPRESS.COM

Read all Instructions before beginning!!!!

Caution – EXTREME DANGER – Caution

Do not use or mix any other manufacturer’s products with any Nitrous Express products. Do not use or mix any Nitrous Express products with any other manufacturer’s products.


THESE INSTRUCTIONS APPLY TO NITROUS EXPRESS PRODUCTS ONLY!  
FOR SANCTIONED RACE USE ONLY - NOT FOR SALE OR USE IN CALIFORNIA

### Switch Panel installation Instructions

1. Pick out the name plates you would like to use and attach them to the switches. The name plates have a small notch that will align on the switch in order to stay in the correct location at all times.



2. Push the name plate firmly up on to the switch.
3. Once you have the name plates on the switches you can install the switches into the switch panel in any order you choose. The Switch panel also has a notch that the switch will slide into to keep the switch from turning.




4. To wire the switches follow these diagrams:


#### Momentary Switch Wiring



#### On/Off Switch Wiring

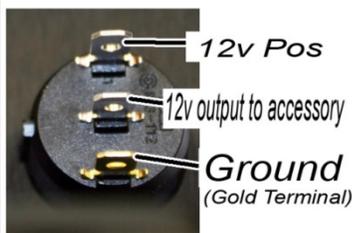

#### Bottle Opener Switch Wiring

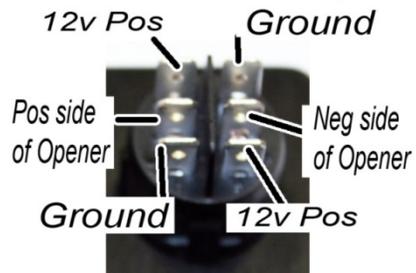

For the Chevrolet pickups/SUV's you will need to remove the dash bezel to install the switch panel.

1. Set the parking brake.
2. Move the column shift lever (on Automatic transmission vehicles) into D1.
3. Pull the dash bezel from the corner and the bezel should pop loose, it is best to remove the bezel completely for now.



4. Once the dash is removed you will need to drill a small hole (3/8" recommended) for the wires to pass through, you can see the two small holes where the mounting tabs go and recommended area to drill hole.



5. Place switch panel in the small compartment and push tabs through the bottom to secure switch panel to the dash bezel.



6. Reinstall dash bezel.

