




# 10 Gallon Reservoir

## P/N: 40015



# Kit Contents

- 10 Gallon Reservoir
- Reservoir Mounting Brackets
- 20 feet High Pressure Tubing
- Solenoid Upgrade
- 1/8" 90 degree Elbow
- 3/8" Reducer Bushing
- 6 mounting bolts (With Hardware)

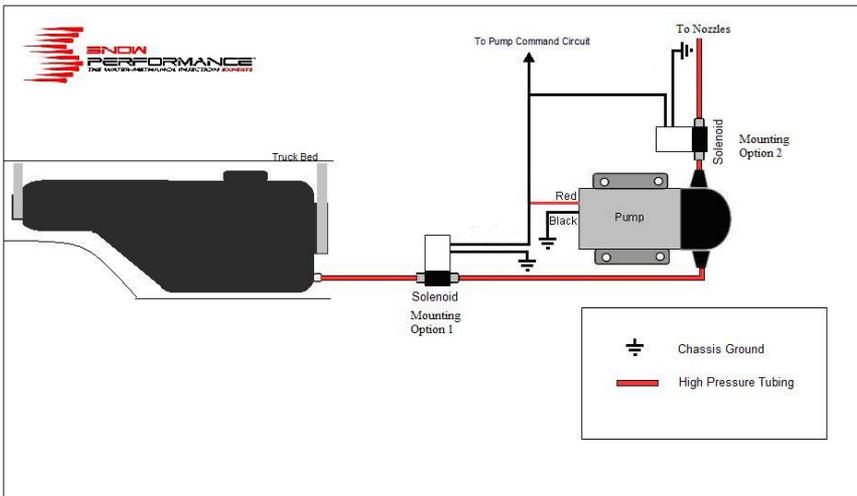

## Reservoir Installation

- Install reducer bushing/filter and 90° quick connect fitting into reservoir outlet. Use E6000® sealant on threads. E6000 sealant can be purchased at any auto parts store or national retailer.




- Install the mounting brackets onto the reservoir with the supplied hardware.
- Test fit reservoir in desired mounting location.



- Prepare the bed rail for reservoir installation. Remove any other hardware such as tonneau cover bed rails.

- Mark the location of the mounting bracket bolt holes.
- Drill through the bed with appropriately sized drill bit. **USE CAUTION WHILE DRILLING.**
- Mount reservoir with aluminum mounting brackets with the supplied hardware.
- Mount pump in desired location. Typical pump placement is under the bed, on the bed floor, or on a frame rail. The pump is a pusher type and must be mounted at the same level as the reservoir outlet or lower. **DO NOT** mount pumps above reservoir or in engine bay.
- Measure and cut tubing from reservoir to pump and pump to injection point.
- To avoid gravity feeding of fluid with rear mount reservoirs, it is essential to use a Solenoid Upgrade in-line between the reservoir and pump or pump and injection point. **DO NOT** operate your rear mount equipped vehicle without a solenoid installed. See Picture diagram for solenoid installation.

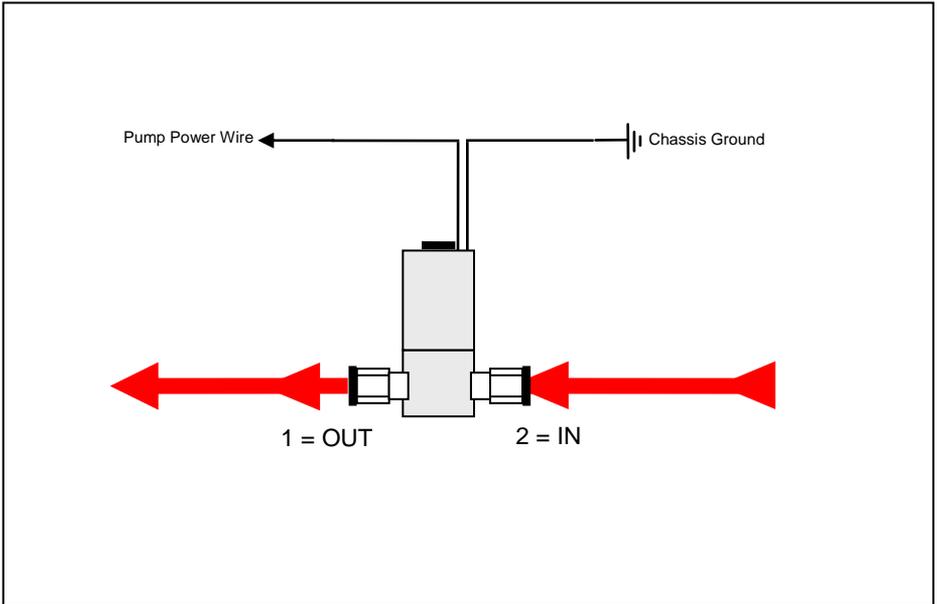

- Install 1/8" NPT quick connect fittings into solenoid using methanol resistant E6000 sealant. Tighten fittings one half turn past hand tight.
- Solenoid is flow directional. Be sure to note which port is the INLET and which is the OUTLET.
- After picking desired solenoid location, measure and cut tubing. Cut tubing using a razor blade and make cuts as square and perpendicular as possible. A slanted cut may create a leak.
- Fully insert end of tubing into quick connect fittings. Firmly pull on tubing to ensure a full and secure connection.
- To remove line, firmly press in on fitting ring to disengage locking clips while pulling tube from fitting.

- Connect one solenoid wire to pump power wire coming from controller or relay. The pump power wire is the one that connects to the RED wire on the pump. Connect other solenoid wire to a good chassis ground.
- Continue with system install as indicated by system instructions

## Disclaimer

Do not use this product until you have carefully read the following agreement.

This sets forth the terms and conditions for the use of this product. The installation of this product indicates that the BUYER has read and understands this agreement and accepts its terms and conditions. Performance products by their nature are designed to increase horsepower and performance not engineered in the original vehicle and the increased stress could result in damage to related systems. This is a high performance product – use at your own risk. Snow Performance Inc., Its agents, employees or owners shall not be under any liability whether in contract or otherwise whether or not resulting from our negligence or contents of information supplied for any damage or loss resulting from such information. The **BUYER** is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications and agrees to hold the **SELLER** harmless from any damage resulting from failure to adhere to such specifications. The **SELLER** disclaims any warranty and expressly disclaims any liability for personal injury or damages. The **BUYER** acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the **BUYER** agrees to indemnify the **SELLER** and to hold the **SELLER** harmless from any claim related to the item of the equipment purchased. Under no circumstances will the **SELLER** be liable for any damages or expenses by reason of use or sale of any such equipment. The **BUYER** is responsible to obey all applicable federal, state, and local laws, statutes, and ordinances when operating his/her vehicle, and the **BUYER** agrees to hold **SELLER** harmless from any violation thereof. The **SELLER** assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt, contact the manufacturer.

Notes: The contents of this document are subject to change without prior notice. No part of or this entire document may be reproduced in any form without prior written permission of Snow Performance, Inc under the copyright except for private use. The names, addresses and telephone numbers mentioned are current as of December 8, 2015. Note that this information is subject to change. Please refer to [www.snowperformance.net](http://www.snowperformance.net) for current information.

**Warranty Policy:**

Snow Performance, Inc. warrants that the Product shall conform to and perform in accordance with published technical specifications and shall be free of defects in materials and workmanship for 1-year providing:

1. You are the original purchaser and provide proof of purchase.
2. The system was purchased from a Snow Performance Authorized Dealer at MRP pricing set by Snow Performance.\*

\*No warranty will be offered for any Snow Performance products if purchased below MRP.

3. For Lifetime warranty, the Warranty Card that came with system (not applicable to separate parts purchases) is returned to Snow within 45-days of purchase and Boost Juice® injection fluid is used exclusively.\*

\* Boost Juice® usage evidenced by invoices/ receipts.

4. An RMA # has been attained and is displayed on package containing returned part.
5. Parts Warranty ~ 90 day warranty on parts purchased separately if used in conjunction with a Snow System. No warranty implied if used with a non-Snow part/system. Subject to Snow's inspection of the product, Snow will remedy defects in materials and/or workmanship by repairing or replacing, at Snow's option, the defective product without charge for parts or labor, subject to the limitations and exclusions described in this warranty.

This warranty does not cover problems caused by normal wear and tear including aesthetic oxidation of surfaces, accidents, unlawful vehicle operation, or modifications or repairs to product not performed or authorized by Snow. This includes any product that is disassembled or taken apart for any reason.

In addition, this warranty does not cover problems resulting from conditions beyond Snow's control including, but not limited to, theft, misuse, overloading, or failure to assemble, mount or use the product in accordance with Snow's written instructions or guidelines included with the product or made available to the original retail purchaser. In the event of failure, Snow will repair or replace the part at Snow's sole discretion. Failures resulting from misapplication or misuse of the Product, failure to adhere to any specifications or instructions, or failure resulting from neglect, abuse, accidents, or act of nature are not covered under this warranty.

Warranty service may be obtained by calling 719-633-3811, getting an RMA (Return Merchandise Authorization), delivering the part to Snow along with proof of purchase. Customer agrees to insure the Product or assume the risk of loss or damage in transit, to prepay shipping charges to Snow, and to use the original shipping container or equivalent. Shipping for Warranty replacement parts shipped outside the continental US will be charged to customer.

### **Non-Warranty Repair/Retest**

Products returned due to damage or misuse and Products retested with no problem found are subject to repair/retest charges. Product will be returned to customer at customer's expense. A credit card number must be provided in order to obtain an RMA (Return Merchandise Authorization) number prior to returning Product.

### **Distributor/Dealer Warranty:**

All customers/dealers must deal directly with Snow performance to receive warranty. No warranty will be issued through a distributor for any reason.

### **Return Policy:**

All returns must be called in for RMA #. Snow Performance will not take used kits or parts for refund. If you are returning an unused kit there is a 15% restocking fee minus shipping/handling. All returns must be made within 90 days of purchase date. No exceptions.

### **LIMITATION OF LIABILITY:**

REPAIR OR REPLACEMENT OF A DEFECTIVE PRODUCT IS THE ORIGINAL RETAIL PURCHASER'S EXCLUSIVE REMEDY UNDER THIS WARRANTY. DAMAGE OR INJURY TO THE ORIGINAL RETAIL PURCHASER, TO HIS OR HER VEHICLE, CARGO, OR PROPERTY, AND/OR TO ANY OTHER PERSON OR PROPERTY IS NOT COVERED BY THIS WARRANTY. THIS WARRANTY IS EXPRESSLY MADE IN LIEU OF ANY AND ALL OTHER EXPRESS WARRANTIES, WHETHER ORAL OR WRITTEN. SNOW'S SOLE LIABILITY IS LIMITED TO THE REMEDY SET FORTH ABOVE. IN NO EVENT WILL SNOW BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, INCIDENTAL, SPECIAL, EXEMPLARY, OR PUNITIVE DAMAGES OR FOR ANY OTHER DAMAGES OF ANY KIND OR NATURE (INCLUDING, BUT NOT LIMITED TO, LOST PROFITS OR LOST SALES). SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.